

Impregnation of eucalyptus and pine wood in alkaline pulping processes. *Effects of steaming and pressurized impregnation*

**Inalbon M.C., M. Citroni, V. Marzocchi,
C. Pieck , M. Zanuttini**

**FIQ - UNL
Santa Fe - Argentina**



Ministerio de Cultura y Educación
UNIVERSIDAD NACIONAL DEL LITORAL
Facultad de Ingeniería Química

Chip Impregnation for pulping

A proper

- Penetration of liquids
- Diffusion of chemicals

Both are necessary for optimal efficiency of:

- Chemical pulping
- Chemimechanical pulping

Uniformity

The uniformity of the impregnation

determines



the uniformity of the chemical
treatment in the first stage of pulping

Is essential for



the homogeneity of the pulp obtained

Distribution of kappa number of a kraft softwood pulp

Kappa number of individual fiber


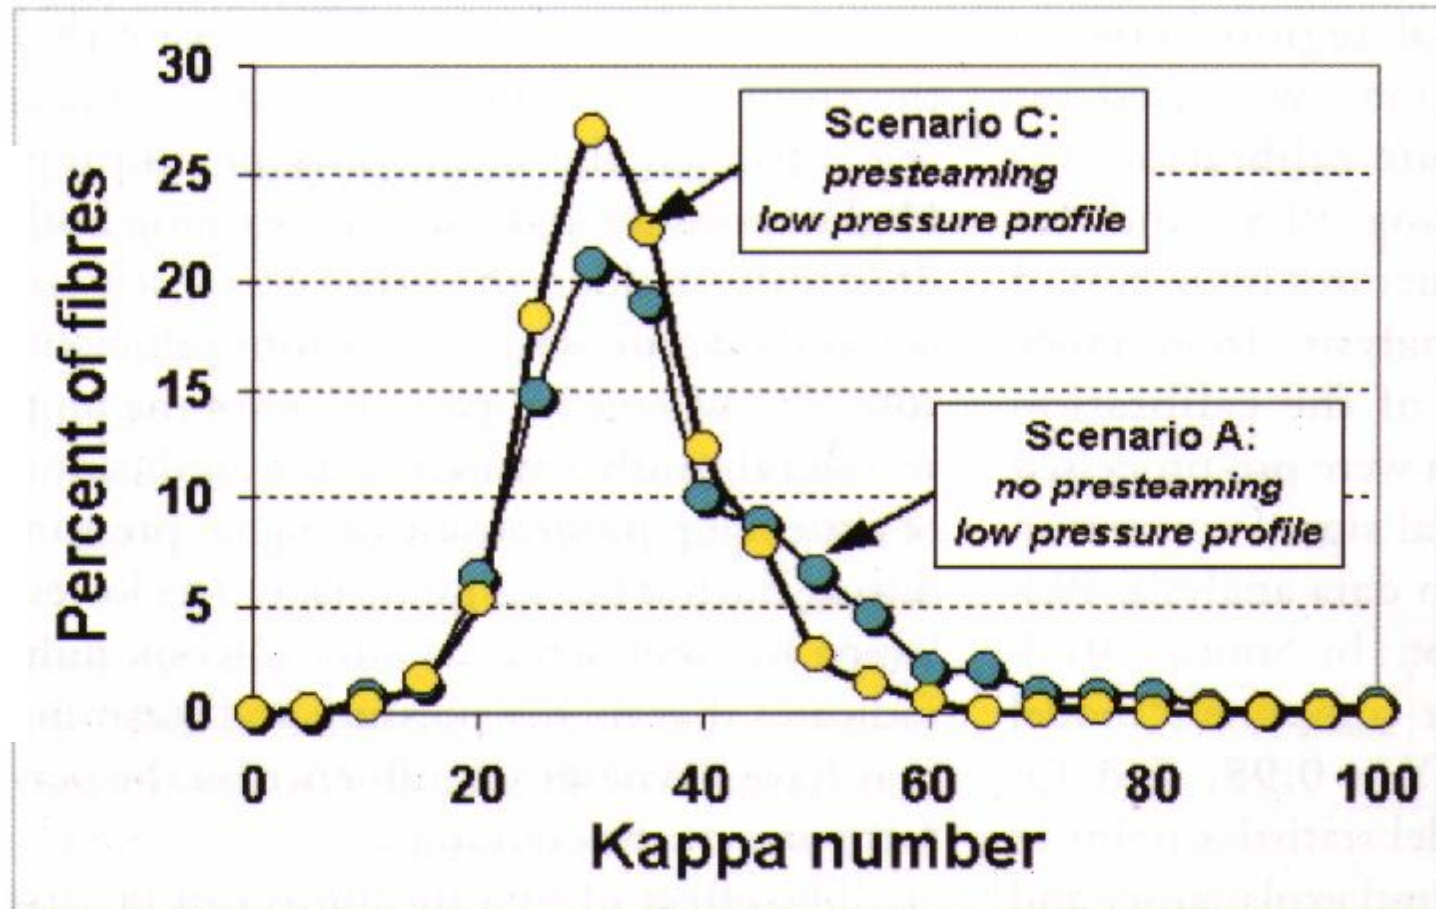


Fig. 6. Fibre kappa distributions: scenario C vs. scenario A.

Flourescence on kraft fibers

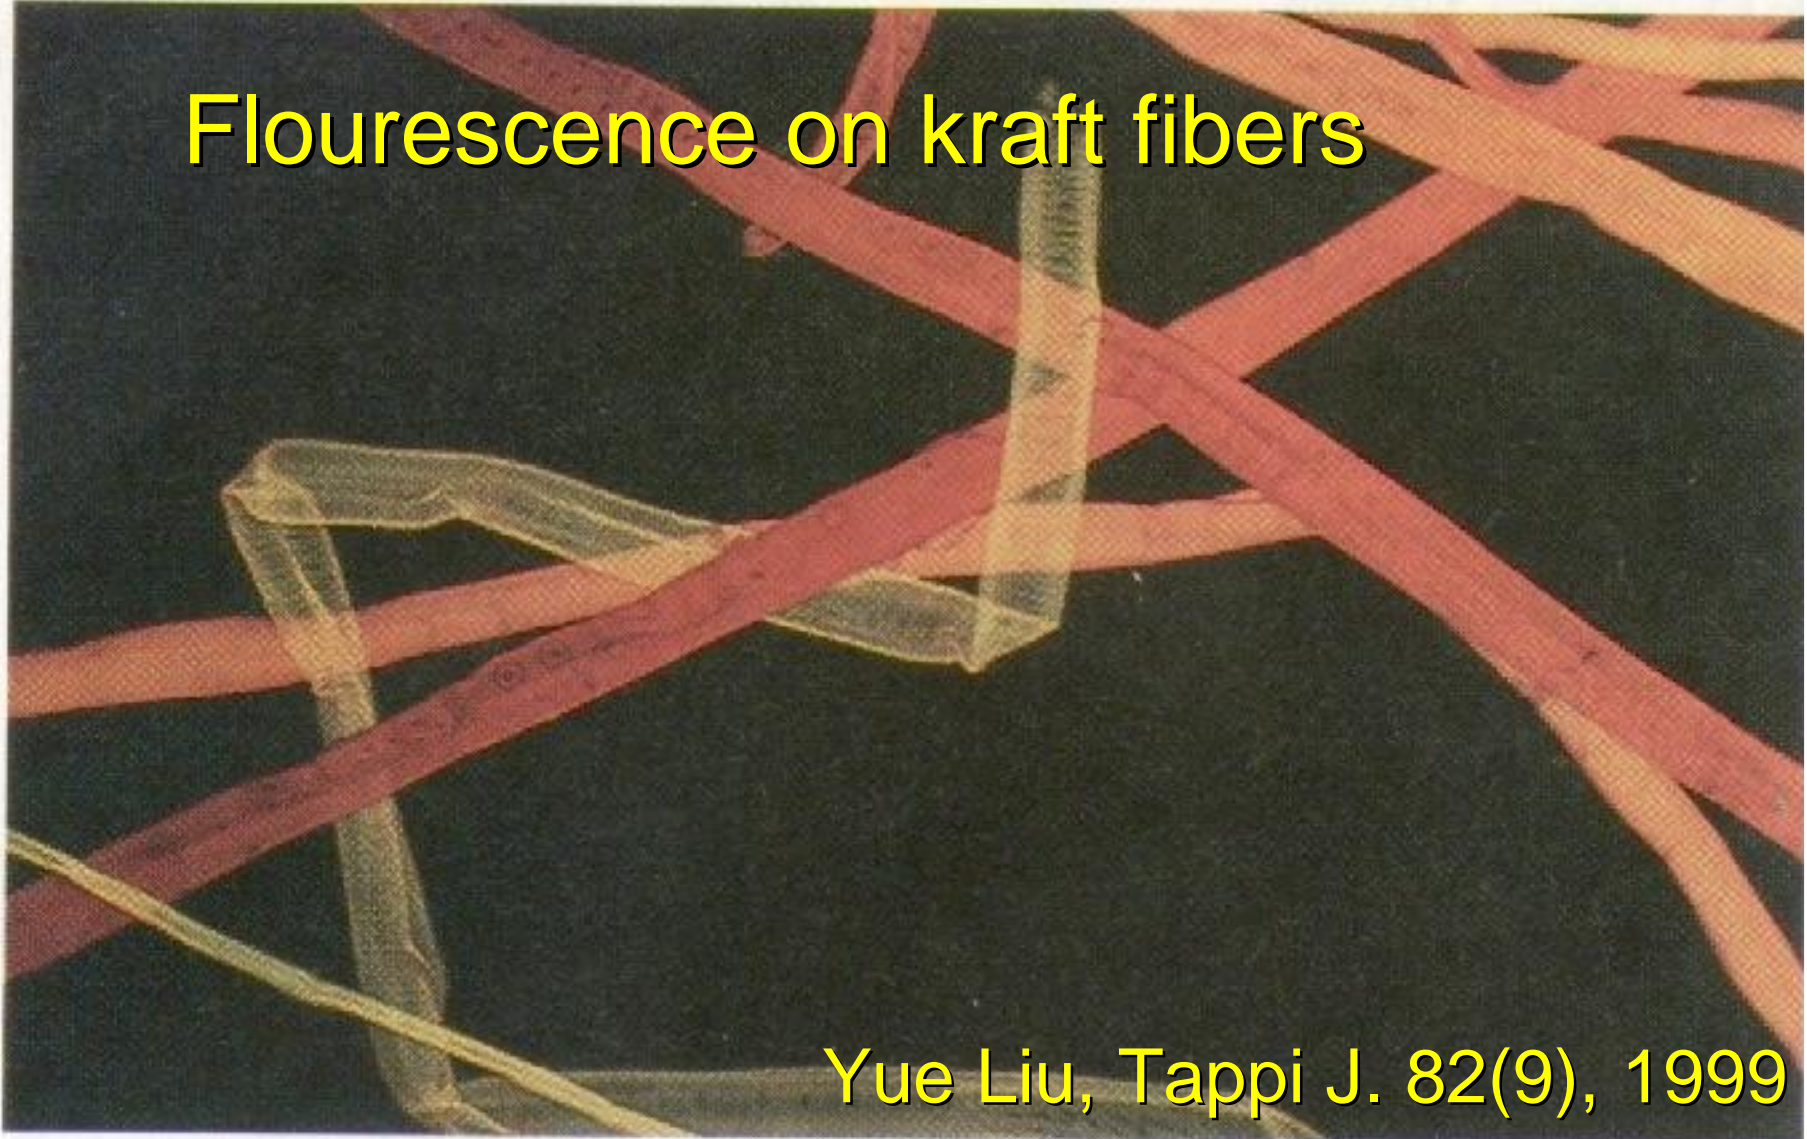

Yue Liu, Tappi J. 82(9), 1999

3. AO stained kraft fibers with kappa nos. 14, 32, and 82 exhibiting green, yellow-orange, and red-orange colors, respectively

The Malkov work shows:

- A fairly broad distribution of kappa of the softwood kraft pulp.
- Distribution can be notably reduced when a proper impregnation is applied

Benefits of a proper wood impregnation in a kraft pulping

In general it is shown in the literature that it can lead to:

- Increase in pulping yield
- Reduction in cooking time
- Reduction in bleaching chemical

The alkaline impregnation phenomenon is complex.


It implies:

- Air removing
- Penetration in the longitudinal direction
- Diffusion in all directions.

- Chemical reactions and wood swelling
- Chemical modification of wood. Alkali diffusion coefficient is changed

Issues not considered in the literature

Chips treated with alkali shows a
impregnation front

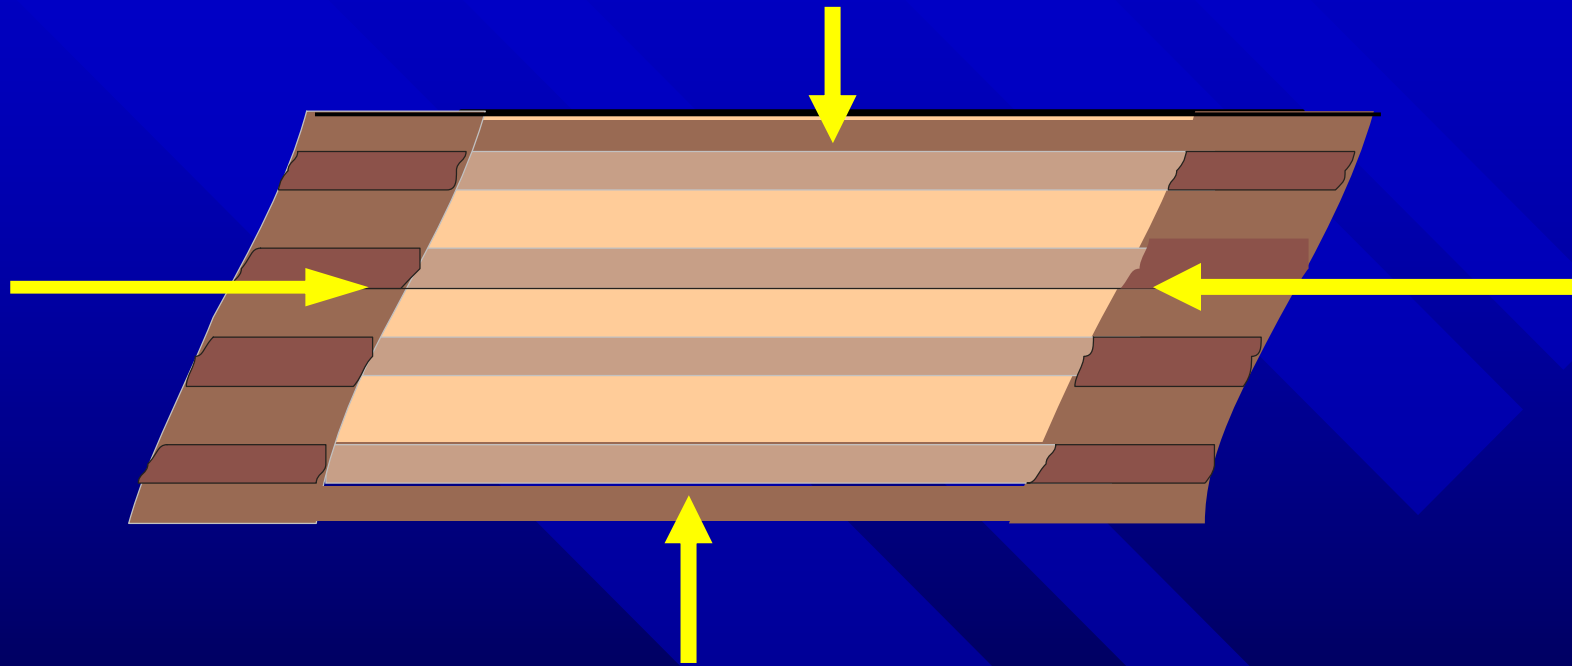

The size of the intact core reduces with time.


Situation depends on the wood and treatment
conditions.

Alkali impregnation of hardwood in transverse direction

For poplar (Zanuttini et al., JPPS 2003) and for eucalyptus wood (Zanuttini et al., Holz un Roh, 2003), it was shown:

At temperatures below 100 °C, impregnation is a reactive diffusion process.

Consumption could be as high as 6.0 % NaOH / wood

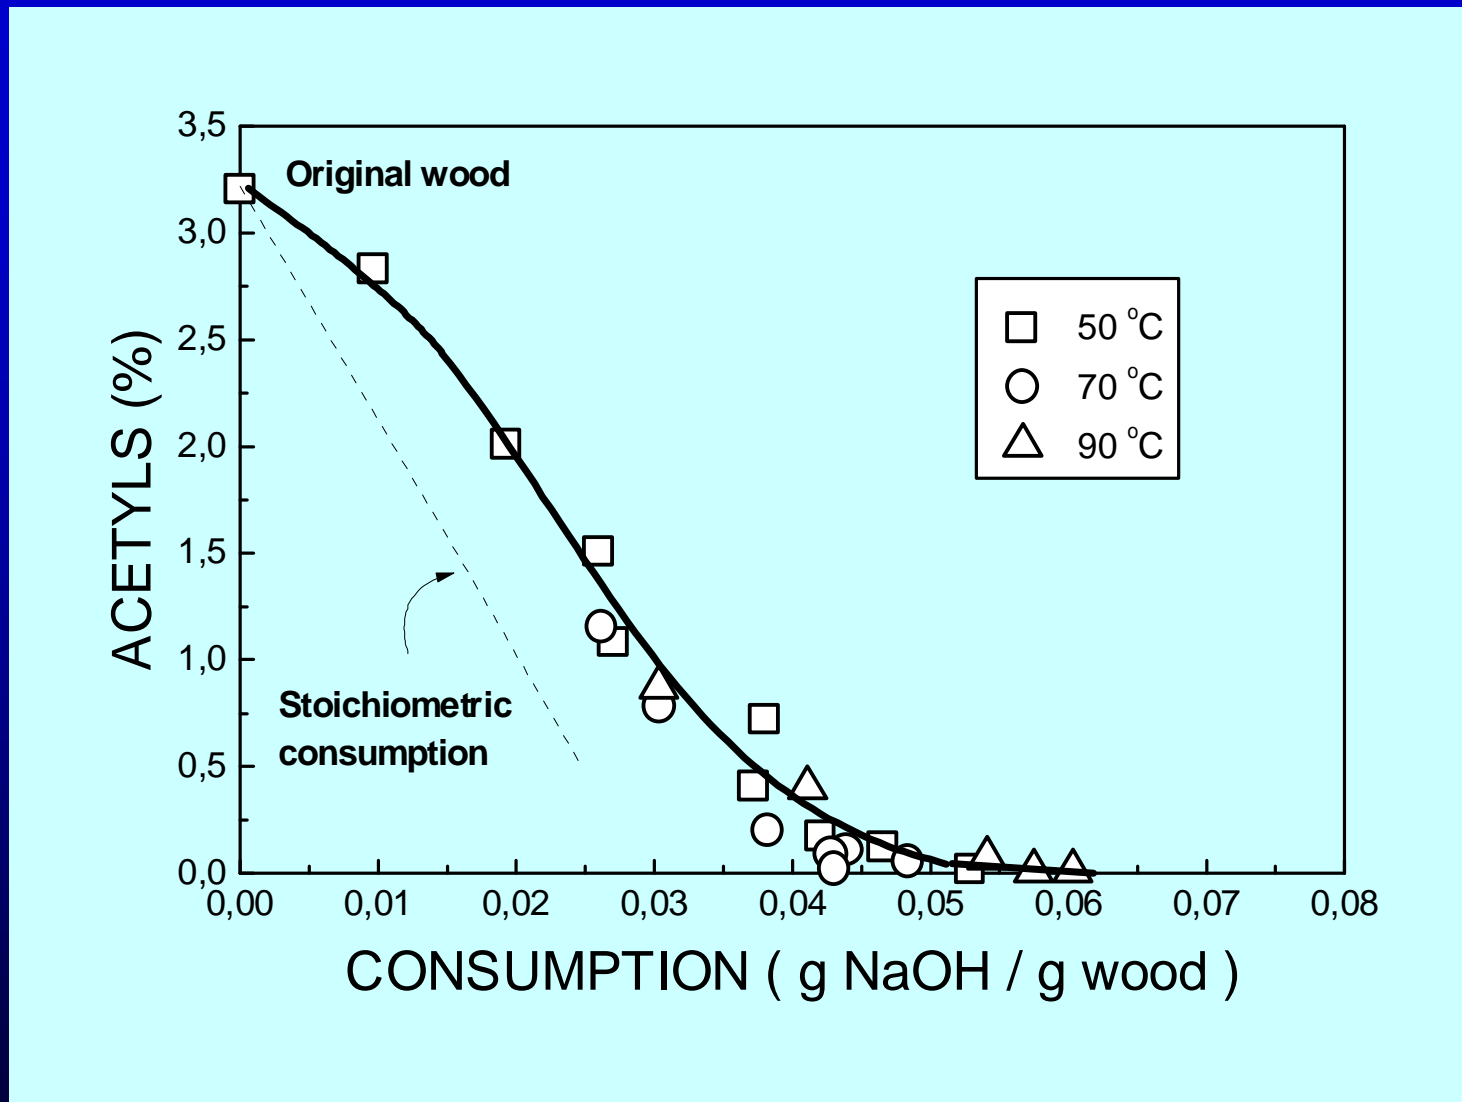

- Deacetylation is the main reaction and is the main responsible for alkali consumption.

Mechanism

At low temperature, it was shown that:

During impregnation, a reactive front is established which separates an intact inner zone from a reacted and swollen outer zone.

Pre-steaming and pressurized impregnation

- Presteaming rapidly heats the wood and the steam produced inside chips is useful to displace the air (Malkov et al 2000).
- When chip is immersed in liquid under pressure, a high liquid uptake takes place (Malkov et al. 2000)
- Presteaming stage and pressurized impregnation should be considered for a impregnation analysis

In this paper:

The pattern of the pressurized alkaline impregnation is analyzed:

pre-steamed wood


pine and eucalyptus wood

Profiles of:

- alkali concentration
- alkali content
- liquid content
- acetyls content


It is shown that the level of impregnation can be predicted for given operation conditions

Experimental

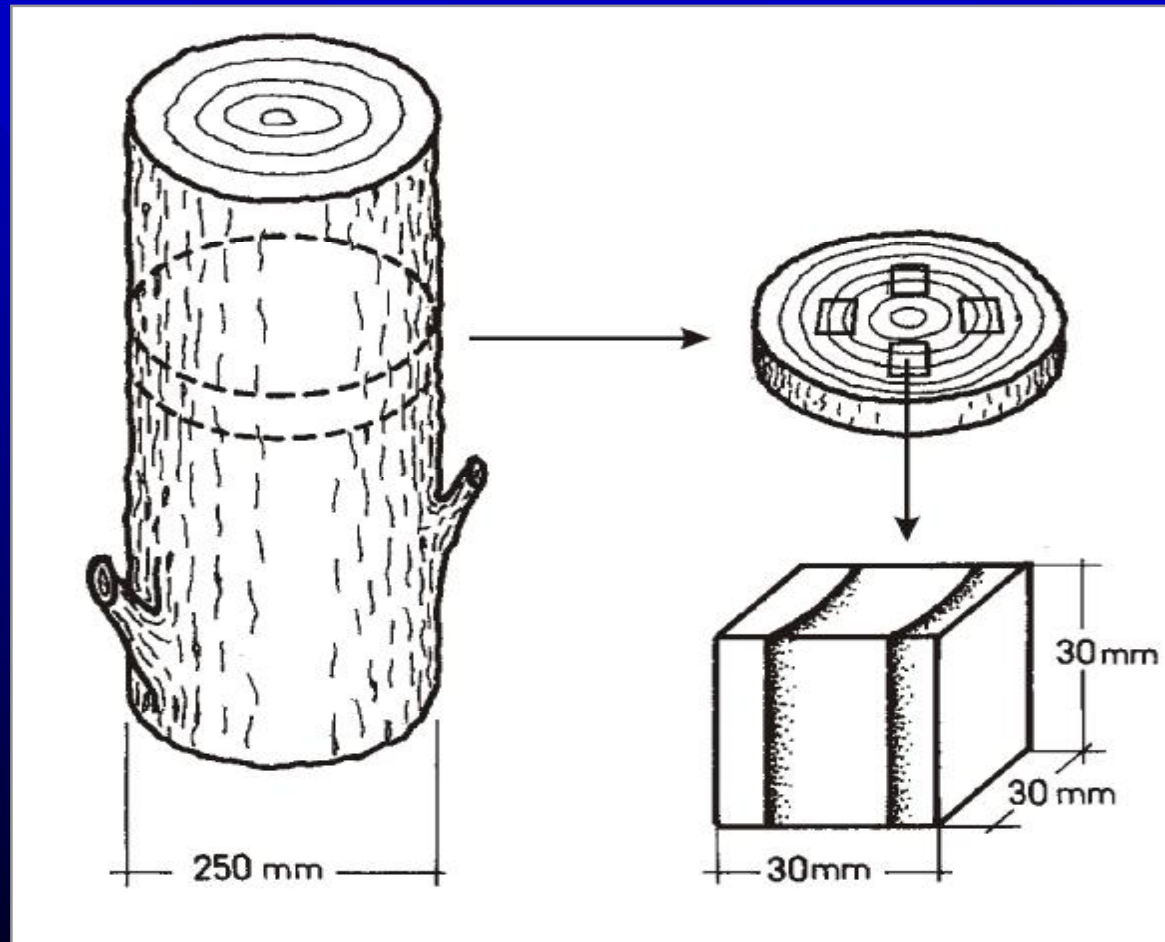

Cubes from eucalyptus wood

Cubes

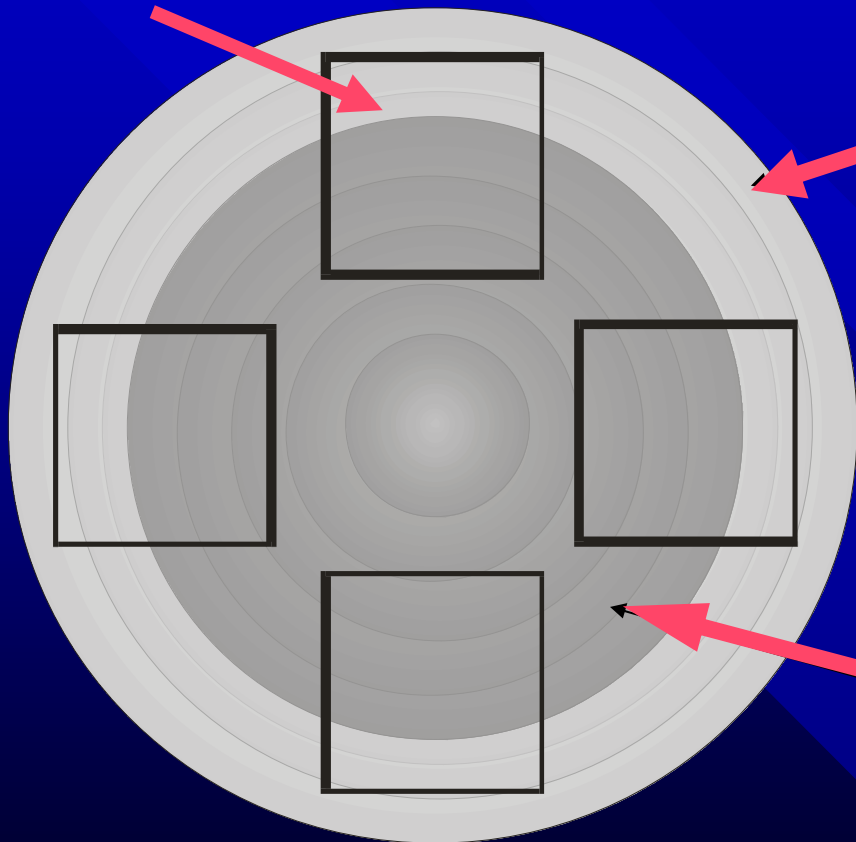

Outer Zone

Inner Zone

Impregnation experiences


A Weverk digester:

- Steaming of wood samples by the liquor vapor
- Pressurization by Nitrogen



Positions of Weverk digester during impregnation

Wood Samples

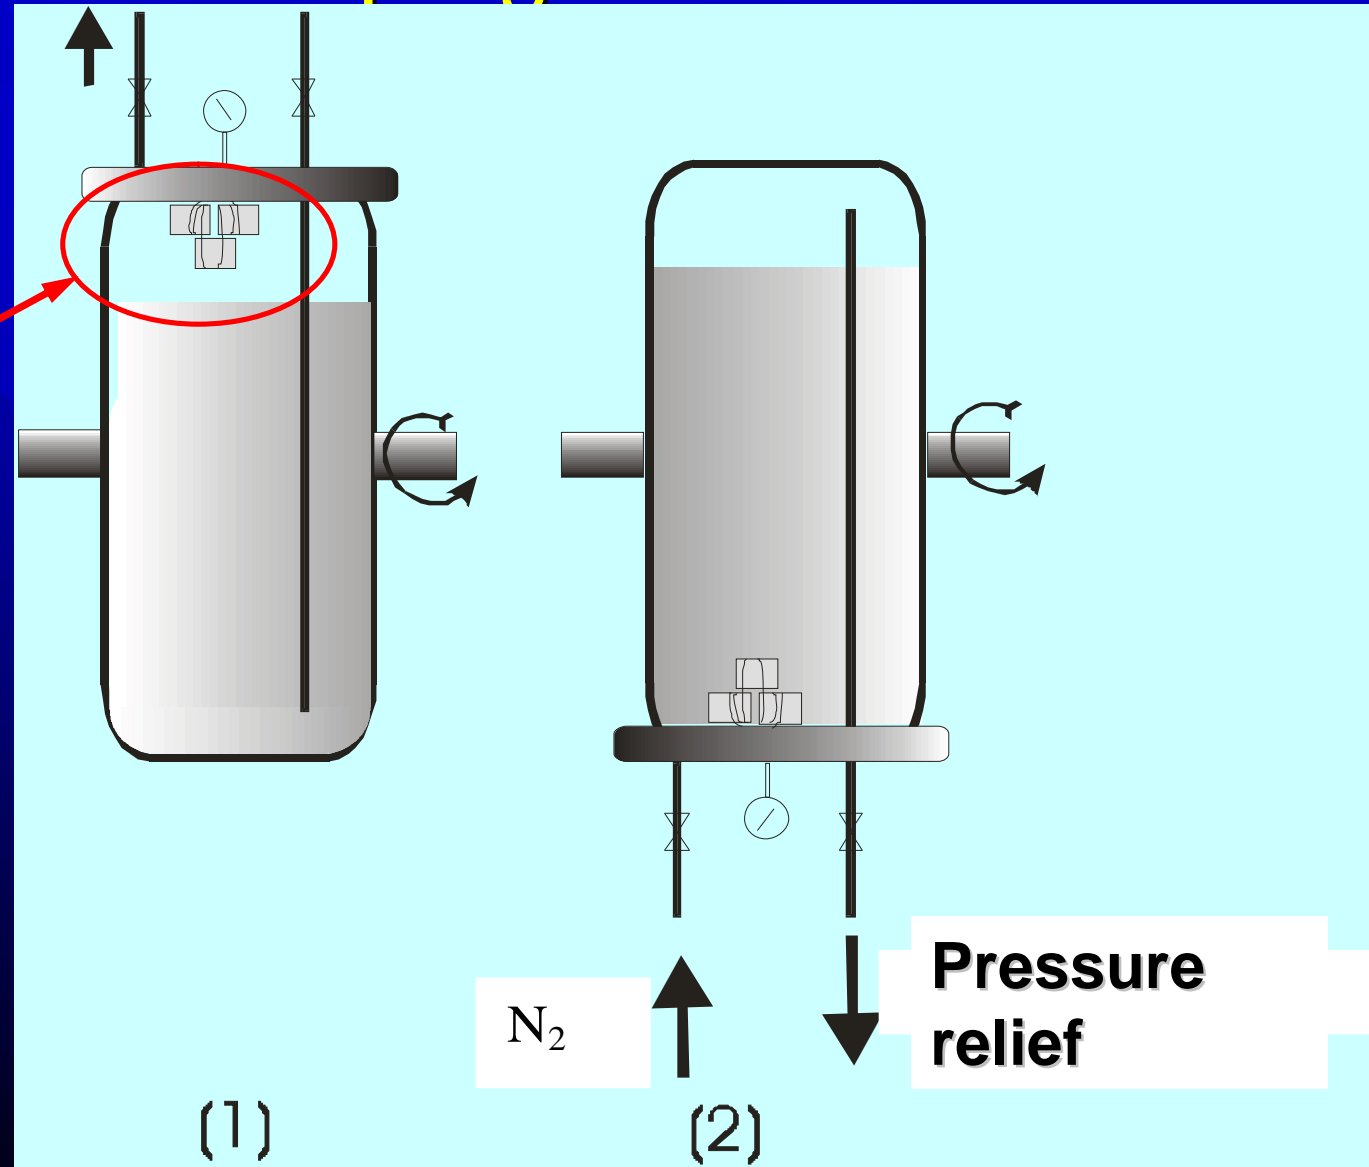

N_2

Pressure relief

Procedure stages

- 1) Preheating of liquor at 100 °C
- 2) Load of samples (under the digester cover)
- 3) Heating, air relief and steaming
- 4) Immersion in the liquor (Position 2) and pressurization up to 6 Bar (N₂)
- 5) Treatment under digester rotation
- 6) Relief of digester (wood submerged in the liquid). Flash in wood was avoided (Position 1)
- 7) Opening of digester and immersion of cubes in liquid Nitrogen by 2 hours.
- 8) Store at freezer temperature.

Slicing of treated cubes


Wood sample is still frozen



Slices are weighed, and chemical analyzed

Tangential face of impregnated wood

Wood vessels

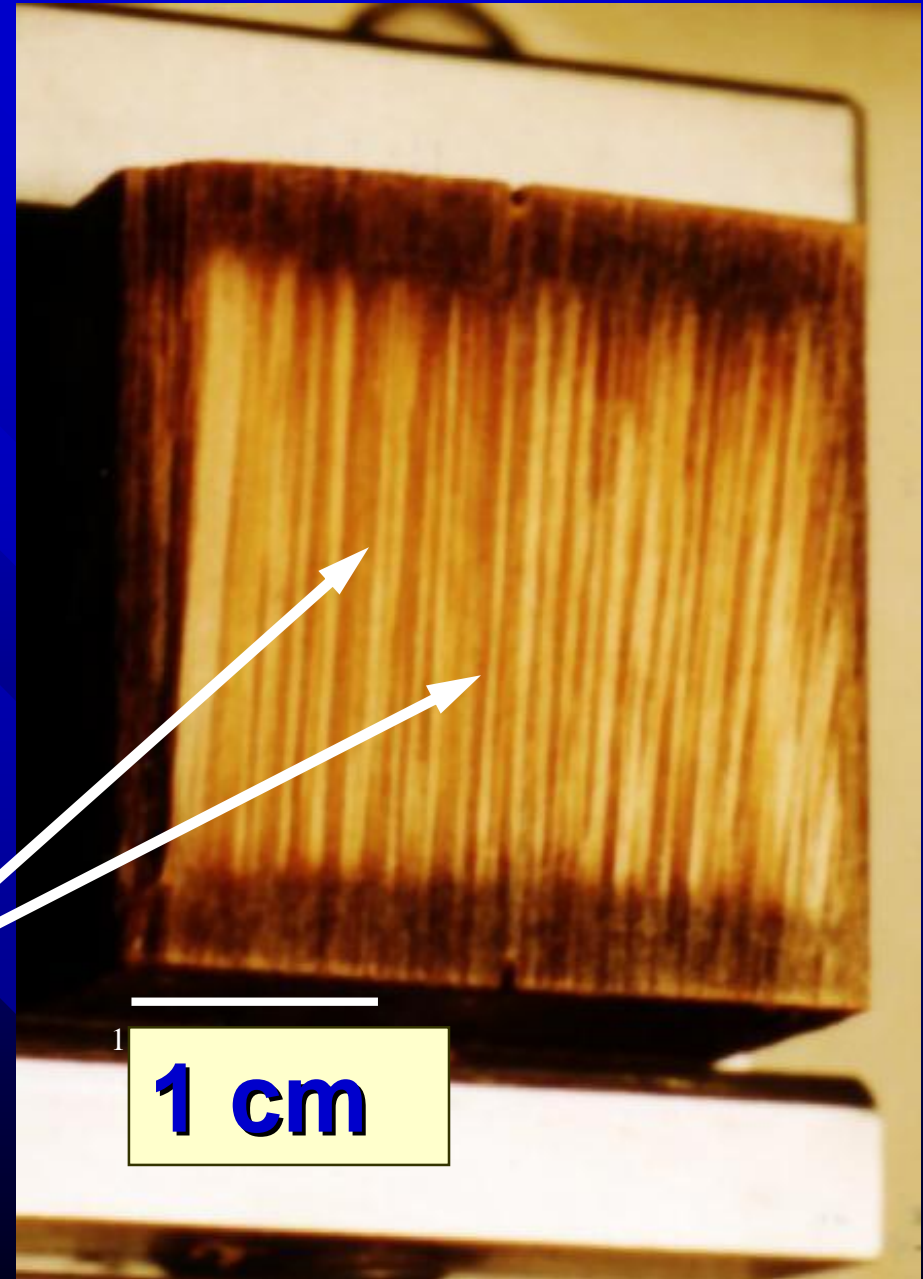

1 cm

Chemical analysis of slices

- Titration →

- Drying

- Acetyl content by GC chromatography




Results


Results

- For Eucalyptus and Pine
- Profiles in radial direction
as a function of the position from de
interphase
- Liquid content of the internal
zone of the wood


Eucalyptus – 15 minutes

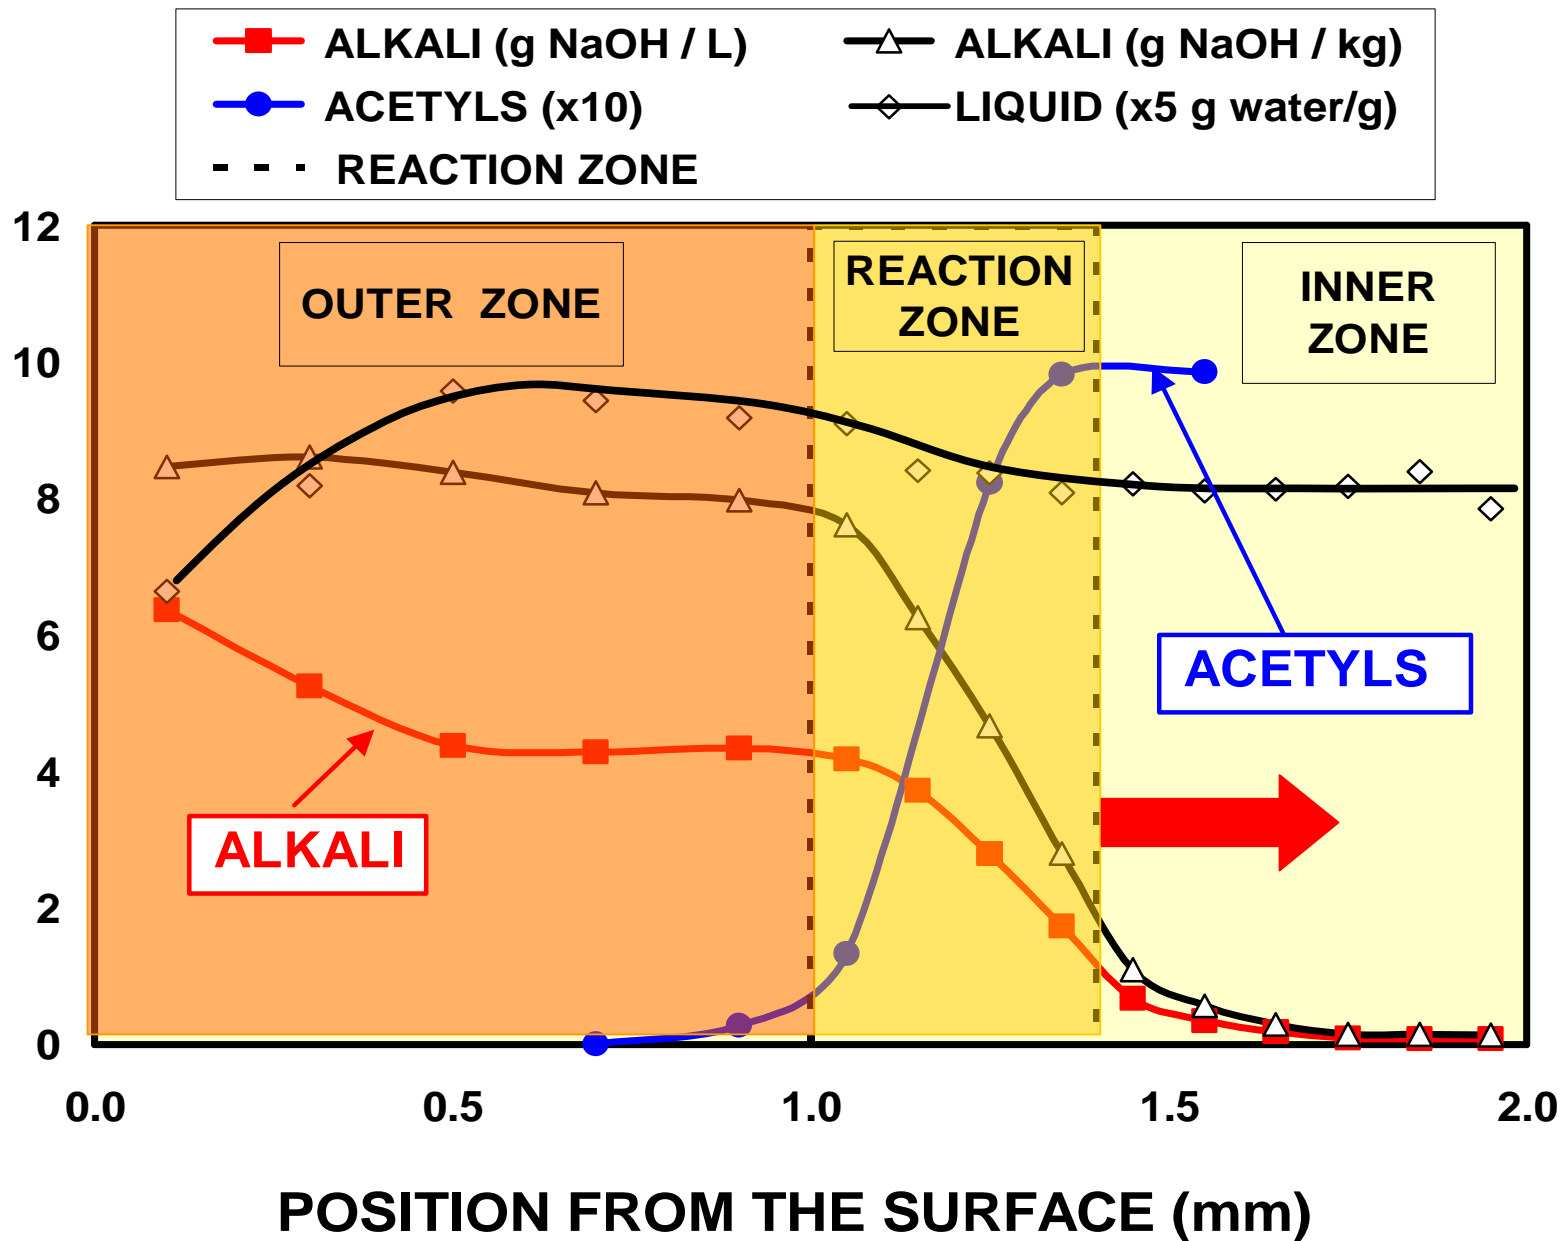

Eucalyptus – 30 minutes

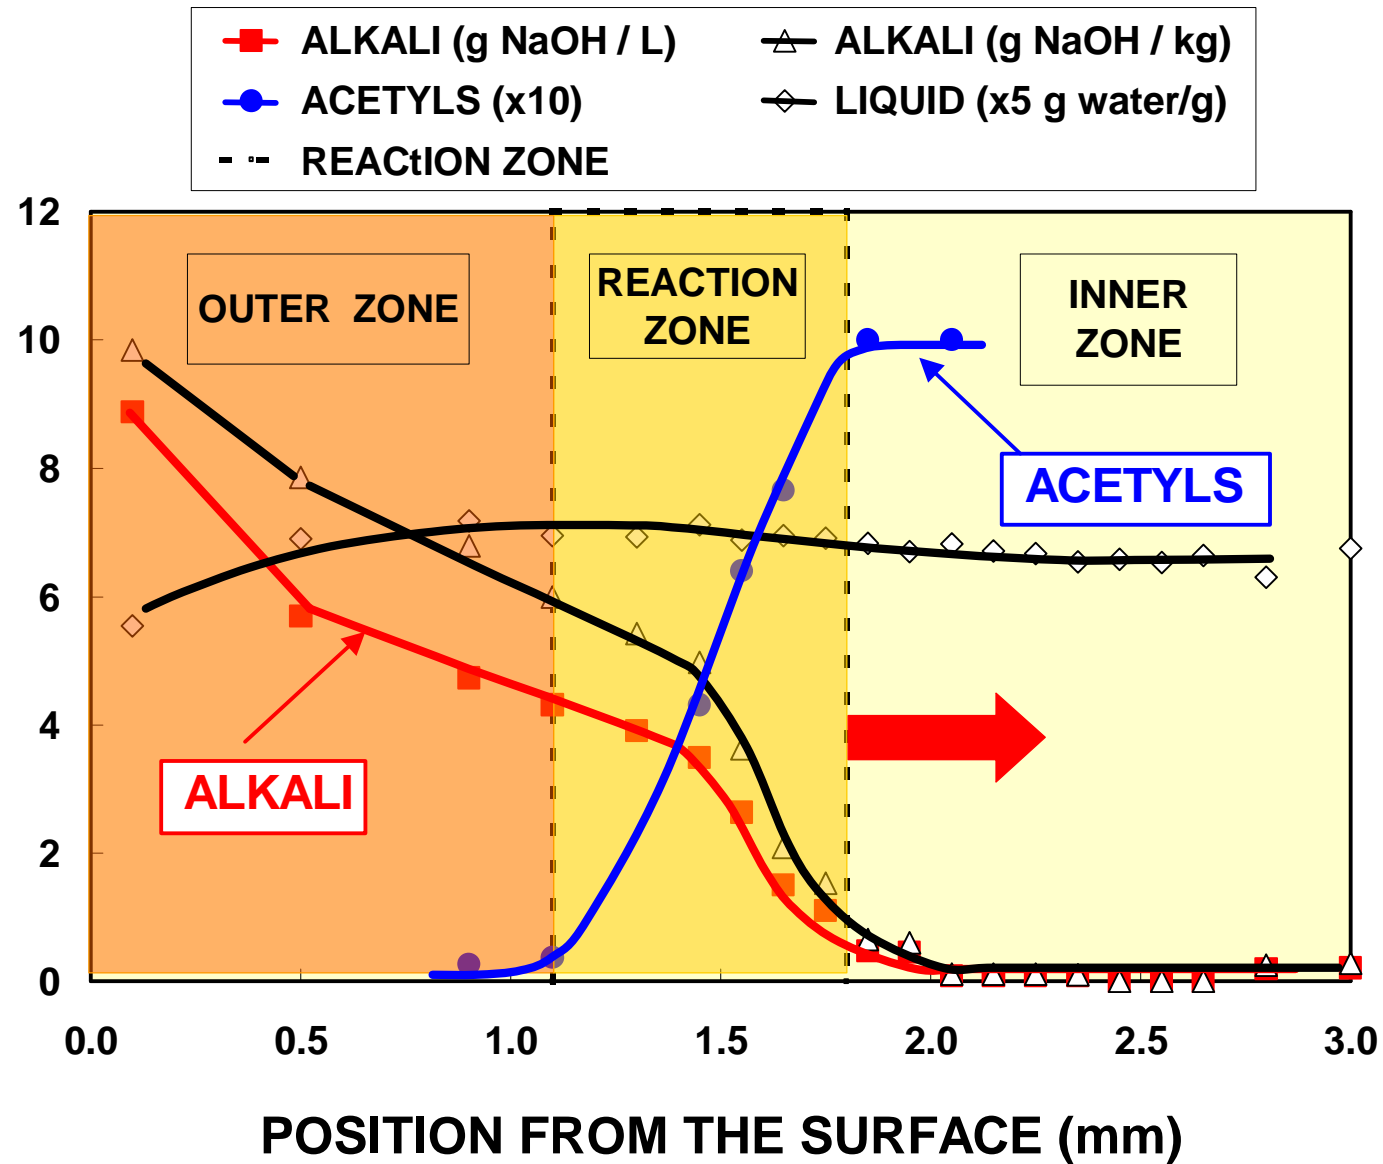

Latewood of pine

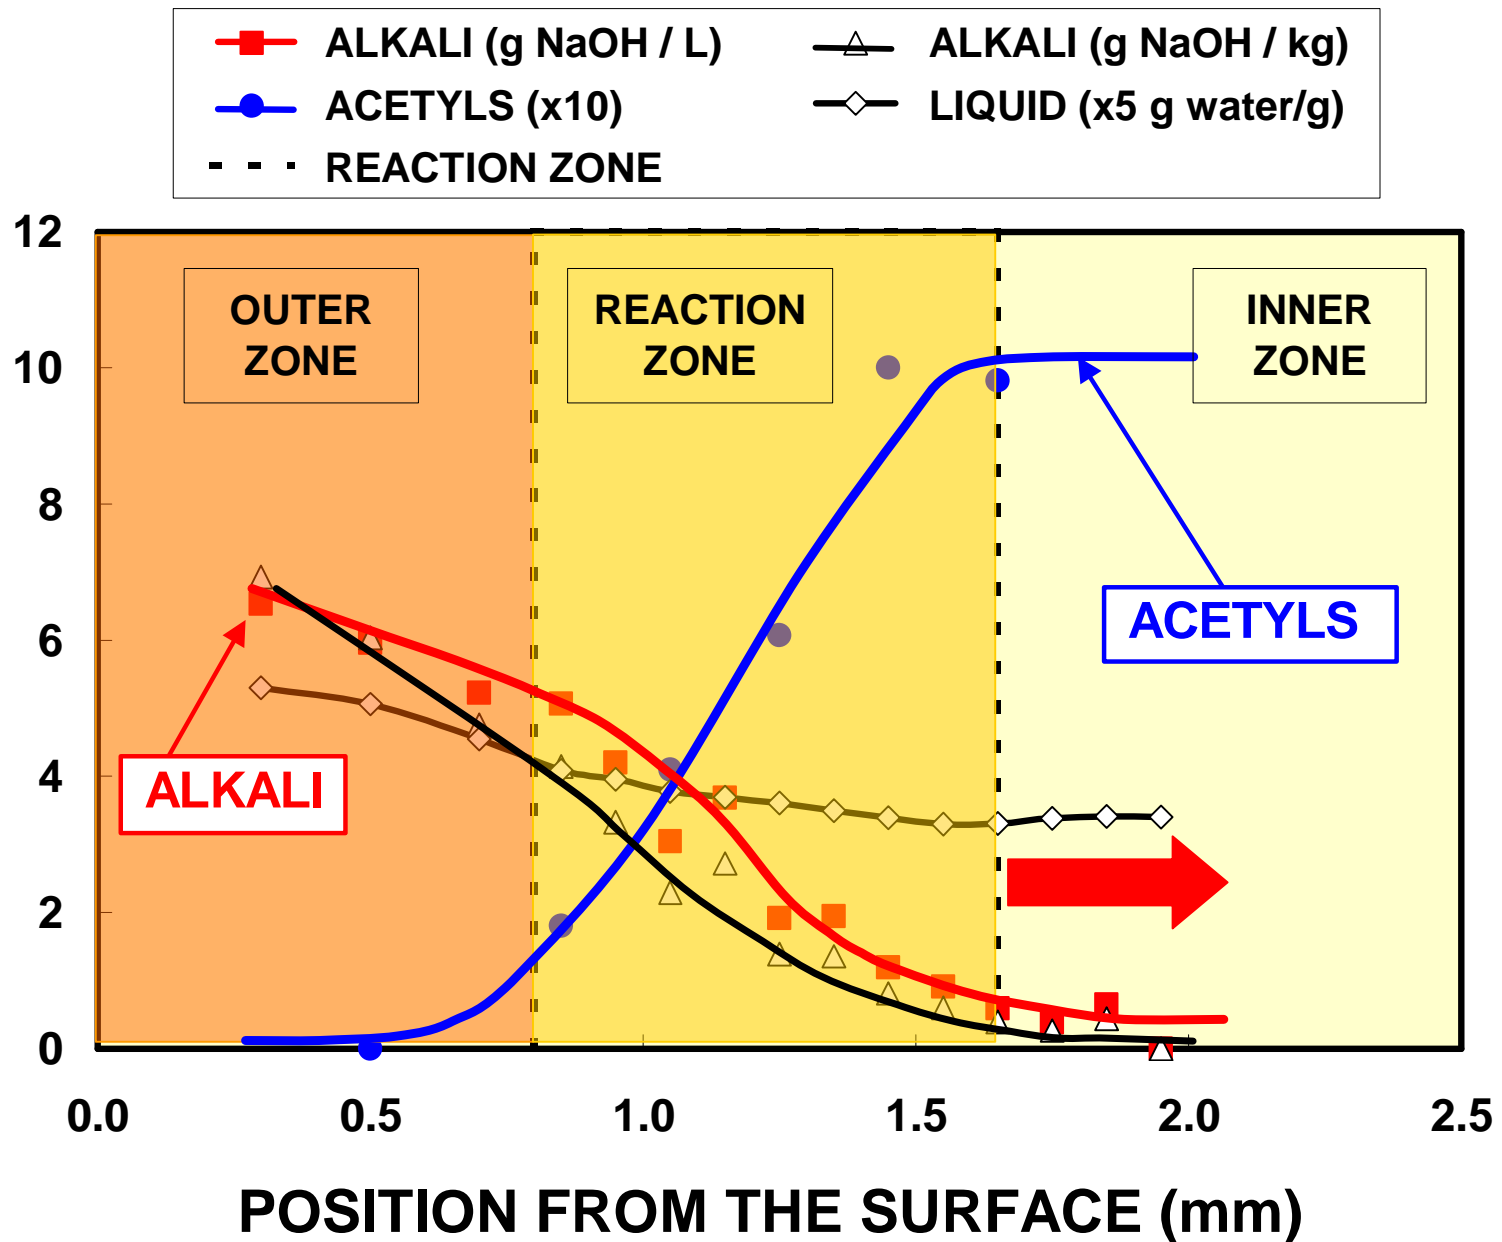

Mechanism of the chip impregnation

Liquor diffusion
and reaction

Spent liquor penetration

Liquor
penetration
and reaction




Liquid content inside wood


| Liquid Content (g / g wood) | <i>Eucalyptus grandis</i> | | <i>Pinus elliotti</i> | |
|--------------------------------|---------------------------|-------------|-----------------------|------------|
| | Exterior | Central | Early-Wood | Late-wood |
| | 1.3 | 0.75 | 2.5 | 0.7 |

Prediction of the impregnation level

The chip half-thickness distribution

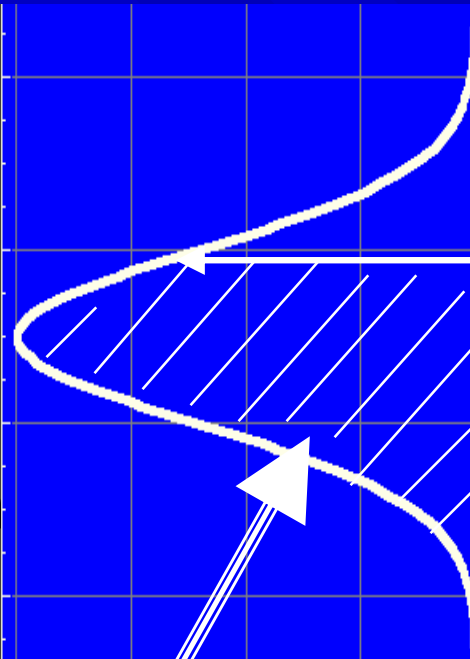

Fraction of impregnated wood

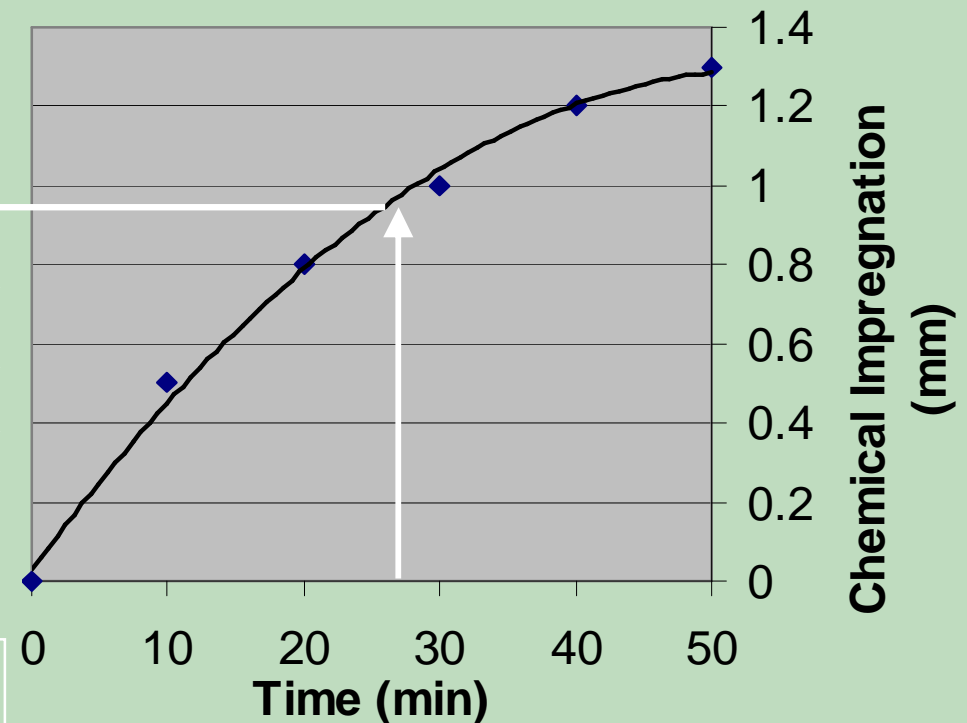

Prediction

If the speed of moving front is know, the level of impregnation can be predicted

Conclusions (1)

- n Steaming (5 minutes) and pressurized immersion (6 Bar) can complete the liquid penetration
 - n Initially alkali does not reach the core a chip
 - n The chemical impregnation: reaction and diffusion
- A front of the impregnation is always established.

Conclusion (2)

The time needed for chemical impregnation (time in which the front reaches the center of the chip) can be predicted for a given wood and treatment conditions

The end

